
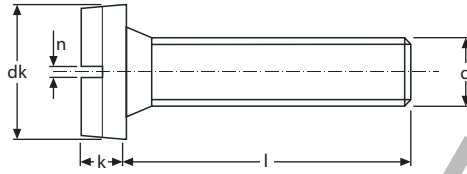


# DIN 84

EN 21207  
ISO 1207  
PN 82215

Wkręt z łbem walcowym,  
z nacięciem prostym  
A2 / A4



n	0,3	0,4	0,5	0,6	0,6	0,6	0,6	0,6	0,6	0,8	1,0	1,2	1,2	1,6	2,0	2,5
dk	2,0	2,3	2,6	3,0	3,4	3,8	4,4	4,5	5,0	5,5	6,0	7,0	8,5	10,0	13,0	16,0
k	0,7	0,8	0,9	1,0	1,2	1,3	1,5	1,6	1,7	2,0	2,4	2,6	3,3	3,9	5,0	6,0

d	M 1	M 1,2	M 1,4	M 1,6	M 1,7	M 2	M 2,3	M 2,5	M 2,6	M 3	M 3,5	M 4	M 5	M 6	M 8	M 10
---	-----	-------	-------	-------	-------	-----	-------	-------	-------	-----	-------	-----	-----	-----	-----	------

l 2	1000	1000		1000												
3	1000	1000	1000	1000	1000	1000	1000	1000	1000	500						
4	1000	1000	1000	1000		1000	1000	1000	1000	500	500	500				
5	1000	1000	1000	1000	1000	1000	1000	1000	1000	500	500	500				
6	1000	1000	1000	1000		1000	1000	1000	1000	500	500	500				
8	1000	1000	1000	1000		1000	1000	1000	1000	500	500	500	500	500		
10	1000	1000	1000	1000	1000	1000	1000	1000	1000	500	500	500	500	500	200	
12			1000	1000		1000	1000	1000	1000	500	500	500	500	500	200	
14				1000		1000	1000	1000		500	500	500	500	500		
16				1000		1000	1000	1000	1000	500	500	500	500	500	200	100
18				1000		1000	1000	1000		500	500	500	500	500		
20				1000		1000	1000	500	1000	500	500	500	500	500	200	100
22						500	1000	500		500	500	500	500	200		
25						500		500		500	500	500	500	200	200	100
28						500		500		500	500	500	500	200		
30						500		500		500	500	500	500	200	200	100
35						500		500		500	500	500	500	200	200	100
40						500				500	500	500	500	200	200	100
45										200	200	500	200	200	200	100
50										200	200	500	200	200	200	100
55										200	200	500	200	200		
60										200	200	500	200	200	100	100
65												200	200	200		
70												200	200	200	100	50
75												200	200	200		
80												200	200	200	100	50
85												200	200	200		
90												200	200	200	100	50
95												200	200	200		
100												200	200	200	100	50
110													200	200		
120													200	200		

Ilość szt. w opakowaniu jednostkowym