



DIN 125A

EN 27089
ISO 7089
PN 82006

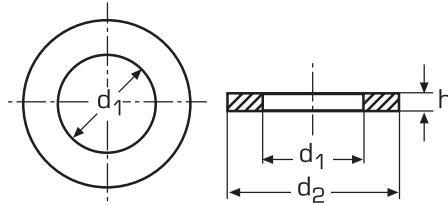

Podkładka okrągła, forma A
1.4310 / A4

d1	dla gwintu	d2	h	
1,7	M 1,6	4,0	0,3	2000
1,8	M 1,7	4,5	0,3	2000
2,2	M 2,	5,0	0,3	2000
2,5	M 2,3	6,0	0,5	2000
2,7	M 2,5	6,0	0,5	2000
2,8	M 2,6	7,0	0,5	2000
3,2	M 3	8,0	0,5	1000
3,7	M 3,5	8,0	0,5	1000
4,3	M 4	8,0	0,8	1000
5,3	M 5	10,0	1,0	1000
6,4	M 6	12,0	1,6	1000
7,4	M 7	14,0	1,6	1000
8,4	M 8	16,0	1,6	500
10,5	M 10	20,0	2,0	500
13,0	M 12	24,0	2,5	200
15,0	M 14	28,0	2,5	200
17,0	M 16	30,0	3,0	200
19,0	M 18	34,0	3,0	200
21,0	M 20	37,0	3,0	200
23,0	M 22	39,0	3,0	100
25,0	M 24	44,0	4,0	100
28,0	M 27	50,0	4,0	50
31,0	M 30	56,0	4,0	50
34,0	M 33	60,0	5,0	25
37,0	M 36	66,0	5,0	25
40,0	M 39	72,0	6,0	25
43,0	M 42	75,0	7,0	25
46,0	M 45	85,0	7,0	10
50,0	M 48	92,0	8,0	10
52,0	M 50	92,0	8,0	10
54,0	M 52	98,0	8,0	10