



DIN 7980

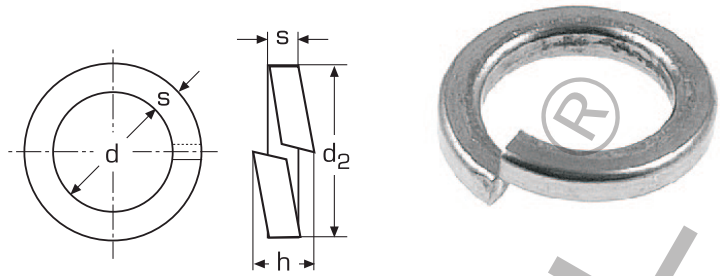

Podkładka sprężysta A1 / A4

d	dla gwintu	d2	h	s	
3,1	M 3	5,6	2,0	1,0	1000
3,6	M 3,5	6,1	2,0	1,0	1000
4,1	M 4	7,0	2,4	1,2	1000
5,1	M 5	8,8	3,2	1,6	1000
6,1	M 6	9,9	3,2	1,6	1000
8,1	M 8	12,7	4,0	2,0	1000
10,2	M 10	16,0	5,0	2,5	500
12,2	M 12	18,0	5,0	2,5	500
14,2	M 14	21,1	6,0	3,0	500
16,2	M 16	24,4	7,0	3,5	200
18,2	M 18	26,4	7,0	3,5	200
20,2	M 20	30,6	9,0	4,5	100
24,5	M 24	35,9	10,0	5,0	100
27,5	M 27	38,9	10,0	5,0	100
30,5	M 30	44,1	12,0	6,0	50