


DIN 551

EN 24766
ISO 4766
PN 82272

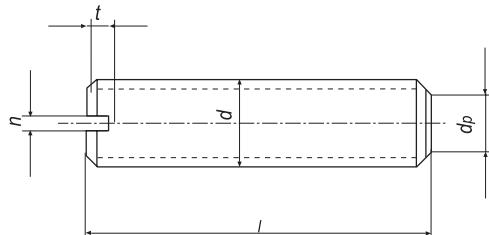

Wkręt dociskowy z końcem płaskim,
 gwint na całej długości, z nacięciem prostym
A2 / A4

d _p	0,8	1,0	1,5	2,0	2,5	3,5	4,0	5,5	7,0	8,5
t	0,56	0,64	0,72	0,80	1,12	1,28	1,60	2,00	2,40	2,80
n	0,25	0,25	0,40	0,40	0,60	0,80	1,00	1,20	1,60	2,00

d	M 1,6	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12
I 2	200	200								
3	200	200	200	200						
4	200	200	200	200	200					
5	200	200	200	200	200	200				
6	200	200	200	200	200	200	200			
8	200	200	200	200	200	200	200	100		
10	200	200	200	200	200	200	200	100	50	
12		200	200	200	200	200	200	100	50	50
16		200	200	200	200	200	200	100	50	50
18					200					
20				200	200	200	200	100	50	50
25					200	200	200	100	50	50
30					200	200	200	100	50	50
35					200	200	200	100	50	50
40					200	200	200	100	50	50
45					200	200	200	100	50	50
50					200	200	200	100	50	50
55						200	200	100	50	50
60							200	100	50	50
70								100	50	50
80									50	50

Ilość szt. w opakowaniu jednostkowym