


# DIN 553

EN 27434  
ISO 7434  
PN 82273

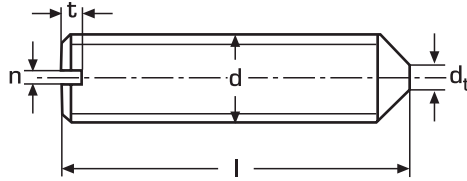

Wkręt dociskowy z końcem stożkowym,  
gwint na całej długości, z nacięciem prostym  
**A2 / A4**

<b>dt</b>	0,16	0,20	0,25	0,30	0,40	0,50	1,50	2,00	2,50	3,00
<b>t</b>	0,56	0,64	0,72	0,80	1,12	1,28	1,60	2,00	2,40	2,80
<b>n</b>	0,25	0,25	0,40	0,40	0,60	0,80	1,00	1,20	1,60	2,00

<b>d</b>	<b>M 1,6</b>	<b>M 2</b>	<b>M 2,5</b>	<b>M 3</b>	<b>M 4</b>	<b>M 5</b>	<b>M 6</b>	<b>M 8</b>	<b>M 10</b>	<b>M 12</b>
----------	--------------	------------	--------------	------------	------------	------------	------------	------------	-------------	-------------

<b>l</b>	<b>2</b>	200	200							
<b>3</b>	200	200	200	200						
<b>4</b>	200	200	200	200	200					
<b>5</b>	200	200	200	200	200	200				
<b>6</b>	200	200	200	200	200	200	200			
<b>8</b>	200	200	200	200	200	200	200	100		
<b>10</b>	200	200	200	200	200	200	200	100	50	
<b>12</b>		200	200	200	200	200	200	100	50	50
<b>16</b>		200	200	200	200	200	200	100	50	50
<b>18</b>				200						
<b>20</b>				200	200	200	200	100	50	50
<b>25</b>					200	200	200	100	50	50
<b>30</b>					200	200	200	100	50	50
<b>35</b>							200	100	50	
<b>40</b>					200	200	200	100	50	50
<b>45</b>								100	50	
<b>50</b>					200	200	200	100	50	50
<b>60</b>								100	50	

Ilość szt. w opakowaniu jednostkowym