



DIN 85

EN 21580

ISO 1580

PN 82219

Wkręt z łbem walcowym,
z nacięciem prostym
A2 / A4

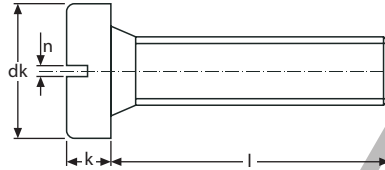

n	0,4	0,5	0,6	0,8	1,0	1,2	1,2	1,6	2,0
dk	3,2	4,0	5,0	6,0	7,0	8,0	10,0	12,0	16,0
k	1,0	1,3	1,5	1,8	2,1	2,4	3,0	3,6	4,8

d	M 1,6	M 2	M 2,5	M 3	M 3,5	M 4	M 5	M 6	M 8
---	-------	-----	-------	-----	-------	-----	-----	-----	-----

l	3	1000	1000	500					
4		1000	1000	500					
5	1000	1000	1000	500	500	500			
6	1000	1000	1000	500	500	500	500	500	
8	1000	1000	1000	500	500	500	500	500	
10	1000	1000	1000	500	500	500	500	500	200
12		1000	1000	500	500	500	500	500	200
14		1000	1000	500	500	500	500	500	
16		1000	1000	500	500	500	500	500	200
18		1000	1000	500	500	500	500	500	
20		1000	1000	500	500	500	500	500	200
22			1000	500	500	500	500	200	
25			1000	500	500	500	500	200	200
30				500	500	500	500	200	200
35				500	500	500	500	200	200
40				500	500	500	500	200	200
45				500	500	500	200	200	
50				500	500	500	200	200	200
55						500	200	200	100
60						500	200	200	
65							200	200	
70							200	200	
75							200	200	
80							200	200	
90							200	200	
100							200	200	

Ilość szt. w opakowaniu jednostkowym