

DIN 913


EN 24026

ISO 4026

PN 82314

Wkręt dociskowy z końcem płaskim,
z gniazdem sześciokątnym

A2 / A4

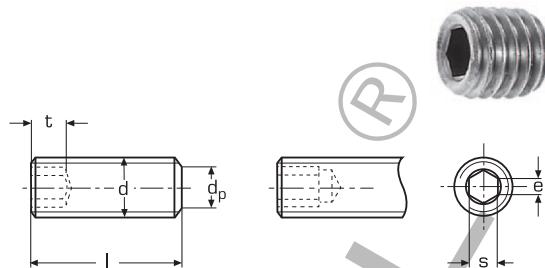

dp	0,8	1,0	1,5	2,0	2,5	3,5	4,0	5,5	7,0	8,5	12,0	15,0
t		1,7	2,0	2,0	2,5	3,0	3,5	5,0	6,0	8,0	10,0	12,0
e		1,003	1,427	1,730	2,300	2,870	3,440	4,580	5,720	6,860	9,150	11,430
s	0,7	0,9	1,3	1,5	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0

d	M 1,6	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
1 2	200	500										
3	200	500	500	500	500							
4	200	500	500	500	500	500						
5	200	500	500	500	500	500	200					
6	200	500	500	500	500	500	200	200				
8	200	500	500	500	500	500	200	200				
10		500	500	500	500	500	200	200	200			
12		500	500	500	500	500	200	200	200	100		
14			500			500	200					
16		500	500	500	500	500	200	200	200	100	50	
20				500	500	500	200	200	200	100	50	50
25					500	500	200	200	200	100	100	50
30					200	200	200	200	200	100	100	50
35						200	200	200	200	100	100	50
40					200	200	200	200	200	100	100	50
45						200	200	200	200	100	100	50
50							200	200	200	100	100	50
55										100		
60											50	50
70											50	25
80											25	25
90											25	25
100											25	25

Ilość szt. w opakowaniu jednostkowym