



DIN 982

PN 82175

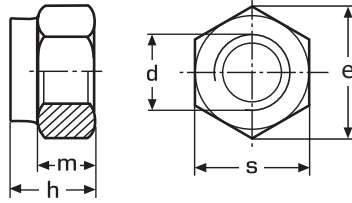

Nakrętka sześciokątna samohamowna,
z wkładem poliamidowym
A2 / A4

d	m	h	e	s	
M 4	3,60	4,7	7,66	7	200
M 5	4,40	6,3	8,79	8	200
M 6	4,90	8,0	11,05	10	20
M 8	6,44	9,5	14,38	13	200
M 10	8,04	11,5	18,90	17	100
M 12	10,37	14,0	21,10	19	50
M 14	12,10	16,0	24,49	22	50
M 16	14,10	18,0	26,75	24	50
M 20	16,90	22,0	32,95	30	25
M 24	20,20	28,0	39,55	36	10