



DIN 985

PN 82175

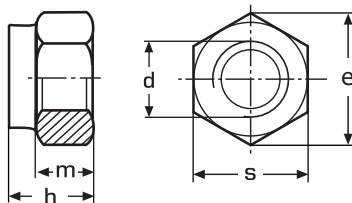

Nakrętka sześciokątna samohamowna,
z wkładem poliamidowym

A2 / A4

d	m	h	e	s	
M 2,5	3,5	3,5	5,50	5,0	500
M 3	2,4	4,0	6,01	5,5	500
M 4	2,9	5,0	7,66	7,0	500
M 5	3,2	5,0	8,79	8,0	500
M 6	4,0	6,0	11,05	10,0	500
M 8	5,5	8,0	14,38	13,0	500
M 10	6,5	10,0	18,90	17,0	200
M 12	8,0	12,0	21,10	19,0	200
M 14	9,5	14,0	24,49	22,0	200
M 16	10,5	16,0	26,75	24,0	100
M 18	13,0	18,5	29,56	27,0	50
M 20	14,0	20,0	32,95	30,0	50
M 22	15,0	22,0	35,03	32,0	25
M 24	15,0	24,0	39,55	36,0	25
M 27	17,0	27,0	45,20	41,0	25
M 30	19,0	30,0	50,85	46,0	25
M 36	25,0	36,0	60,79	55,0	25